


RB90

Cam Küpeşte Sistemi / Glass Railing System

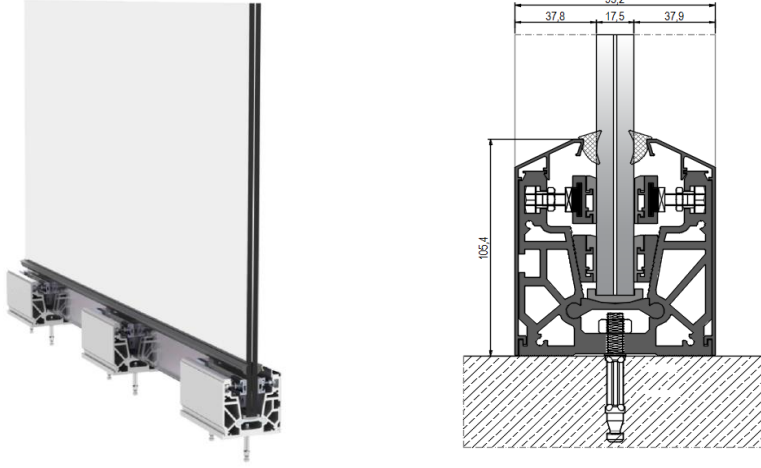

TEKNİK ÖZELLİKLERİ / TECHNICAL PROPERTIES

ALAŞIM/ ALLOY	6082
ÖZGÜL AĞIRLIK/ DENSITY	2,71 gr/cm ³
ELASTİSİTE MODÜLÜ/ ELASTICITY COEFFICIENT	7x10 ¹⁰ N/m ²
MAX. CAM KALINLIĞI/ MAX. GLASS THICKNESS	8+8 mm

KULLANIM SEÇENEKLERİ / APPLICATION ALTERNATIVES

FARKLI TİPTE KAPAK ALTERNATİFLERİ/ DIFFERENT TYPES OF CAP ALTERNATIVES
50 MM AYAR İMKANI/ 50 MM ADJUSTMENT POSSIBILITY
İÇE VE DIŞA EĞİMLİ CAM UYGULAMASI/ INWARDLY AND OUTWARDLY INCLINED GLASS APPLICATION

PERFORMANS DEĞERLERİ / PERFORMANCE VALUES

STATİK YÜKLEME TESTİ - ASTM E 935 (STATICAL LOADING TEST)	1 KN/M ²	 04.2017
--	---------------------	---